

Level control - automatically maintains the working height

A good and comfortable working height - with the level control the height is automatically maintained at an ergonomically correct working height.

The working position of the user is ergonomically correct, and the improved working environment helps prevent injuries and strain on the user.

The efficiency of the operator will be increased as a consequence of the improved working conditions.

High quality is ensured through an extended test program and in cooperation with experts in Health and Safety.



Technical Specifications

The working height is automatically maintained - the forks raise when unloading material and lower when loading material.

Optimum safety for the user:

- A warning lamp flashes when the forks are lifting/lowering
- Instant stop makes the lifting/lowering function stop immediately
- The bottom stop ensures a clearance

Further advantages:

- Turnable photocell - can be adjusted according to the location of the goods
- Adjustable detection range: From 8" to 47"
- The top stop protects the motor
- The buttons are covered by a protective film




The level control can be placed on either the left or right hand side, and is easy to retrofit.



By means of the electric sensor, the forks raise when unloading material and lower when loading material.



The truck also functions as ordinary lifting truck.

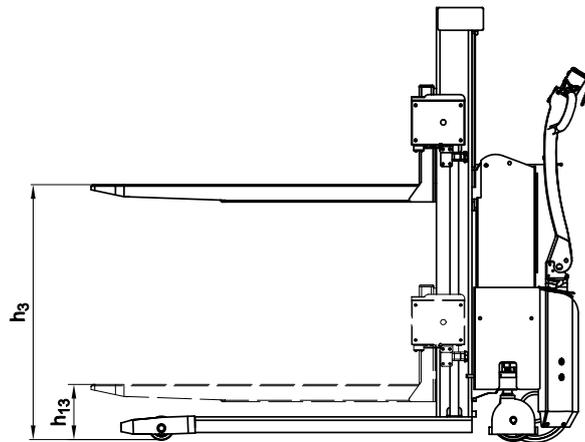

The level control is shown fitted on a fully powered Logiflex. It can also be fitted on the electric Thork-Lift, Trans-Positioner and Trans-Stacker range (without telescopic mast)



The height of the photocell can be adjusted. Thork-Lift: between 19.25" - 38". TP and TS: between 21.75" - 36".

Product (measured in inch)		Thork-Lift	Trans-Positioner Trans-Stacker
Lifting height activated level control	h_3	31.5	35.5
Lowered height activated level control	h_{13}	8	8



Can be fitted on the electric Thork-Lift and Trans-Positioner and Trans-Stacker range (also on stainless trucks).



For protection against crushing injuries.



The user sets the level control to raise or lower.



Control box has adjustable reaction time: from 1-25 sec.

*We also offer tailor-made solutions.
Please ask for further information or visit www.interthor.com*